




FRAC BALLS G-10/FR4 Glass Epoxy

MATERIAL PROPERTIES

Specific Gravity	1.85
Tensile Strength	38,000 PSI
Compressive Strength	66,000 PSI
Flexural Strength	60,000 PSI
Hardness, M Scale	115
Shear Strength	21,500 PSI
Flammability Rating	94V-0
Max. Operating Temp	180° C
Max. Operating Temp	356° F
Water Absorption	.10% by Wt., 24 hrs.

Precision Ground Sizes:
1/2" – 4 1/2"

Custom Sizes Available:
(1/16" Increments)

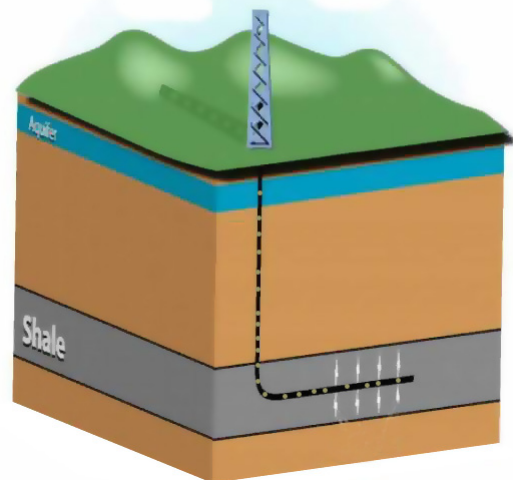

- **Excellent Performance in High Pressure Down Hole Applications**
- **Full Range of Materials Available to Meet Your Toughest Requirements:** Phenolic, Aluminum, Bronze, Stainless Steel Balls

CICBallCompany



2280 Amber Drive Hatfield, PA 19440

215.822.3380 sales@cicball.com www.cicball.com